


## PRODUCT SUBMITTAL SHEET

### Z METAL FURRING

DESCRIPTION	
Depth Sizes (A)	5/8" to 12"
Flange Sizes (B)	1" to 12"
Thickness	18mils (25ga), 30mils (22ga), 33mils (20ga), 43mils (18ga), 54mils (16ga), 68mils (14ga), 98mils (12ga) <i>Produced with 33ksi steel (33mils and 43mils).</i> <i>Produced with 50ksi steel (54mils and greater).</i>
Coating	G40, G60, G90
Meets Standards	ASTM A1003, ASTM A653

COLOR CODE	
18mils	CLEAR
30mils	RED
33mils	WHITE
43mils	YELLOW
54mils	GREEN
68mils	ORANGE
98mils	BLACK

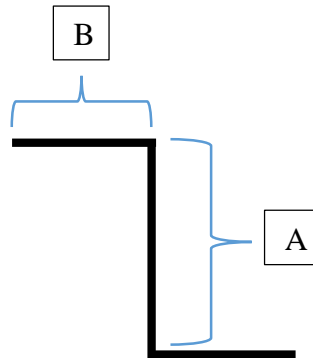

DESIGNATION THICKNESS	MINIMUM BASE STEEL THICKNESS		DESIGN THICKNESS	
	(inch)	(mm)	(inch)	(mm)
18	0.0179	0.455	0.0188	0.478
30	0.0296	0.752	0.0312	0.792
33	0.0329	0.836	0.0346	0.879
43	0.0428	1.087	0.0451	1.146
54	0.0538	1.367	0.0566	1.438
68	0.0677	1.720	0.0713	1.811
98	0.0966	2.454	0.1017	2.583